


# Carbon Performance assessment of oil and gas producers: note on methodology

October 2024

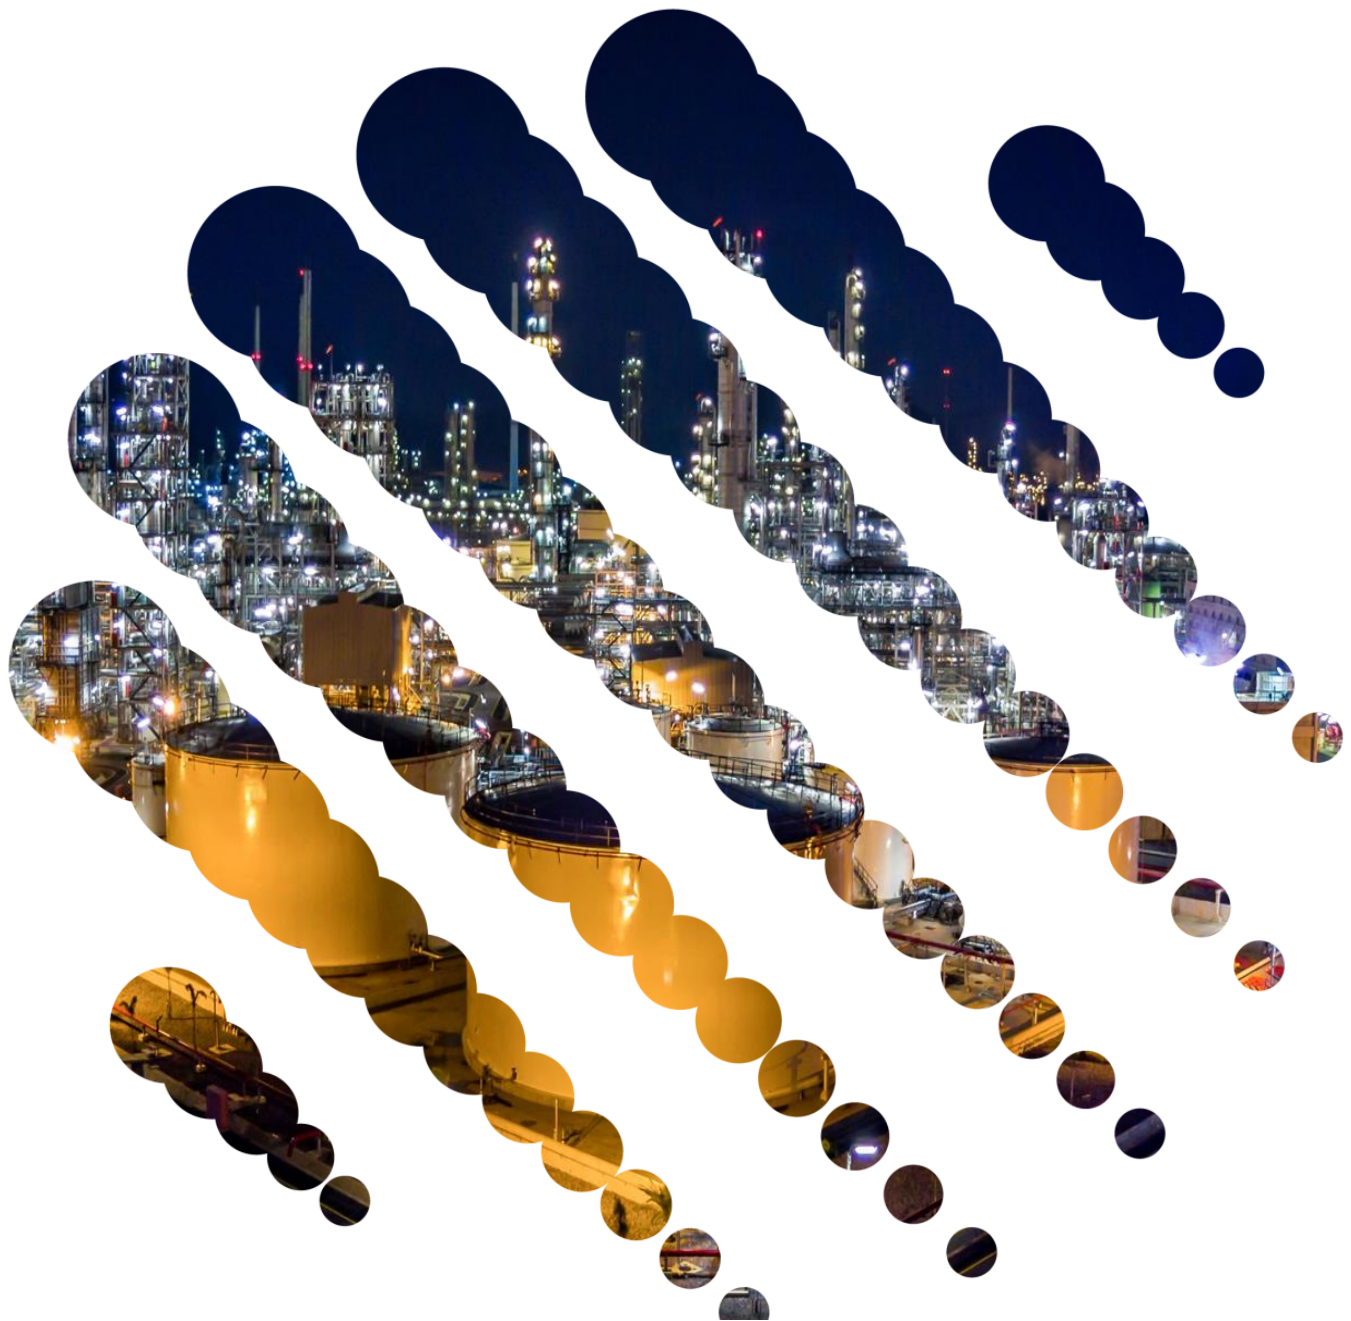

Simon Dietz, Nikolaus Hastreiter, Valentin Jahn, Ali Amin and Seyed Alireza Modirzadeh

## About the LSE Transition Pathway Initiative Centre

The Transition Pathway Initiative Centre (TPI Centre) is an independent, authoritative source of research and data on the progress of corporate and sovereign entities in transitioning to a low-carbon economy.

The TPI Centre is part of the Grantham Research Institute on Climate Change and the Environment, which is based at the London School of Economics and Political Science (LSE). It is the academic partner of the Transition Pathway Initiative (TPI), a global initiative led by asset owners and supported by asset managers, aimed at helping investors assess companies' preparedness for the transition to a low-carbon economy and supporting efforts to address climate change. As of October 2024, over 150 investors globally, representing over US\$80 trillion combined Assets Under Management and Advice, have pledged support for TPI.<sup>1</sup>

The TPI Centre provides research and data on publicly listed equities, corporate bond issuers, banks, and sovereign bond issuers. The TPI Centre's company data:

- Assess the quality of companies' governance and management of their carbon emissions and of risks and opportunities related to the low-carbon transition.
- Evaluate whether companies' current and planned future emissions are aligned with international climate targets and national climate pledges, including those made as part of the Paris Agreement.
- Form the basis for the Climate Action 100+ Net Zero Company Benchmark Disclosure Framework assessments.
- Are published alongside the methods online and fully open access at [www.transitionpathwayinitiative.org](http://www.transitionpathwayinitiative.org).

## About the authors

**Simon Dietz** is the Research Director at the TPI Centre and a Professor of Environmental Policy in the Department of Geography and Environment at the London School of Economics and Political Science.

**Nikolaus Hastreiter** is a Policy Fellow at the TPI Centre and a PhD student in the Department of Geography and Environment at the London School of Economics and Political Science.

**Valentin Jahn** is the Deputy Director at the TPI Centre.

**Ali Amin** is the Carbon Performance Research Project Manager at the TPI Centre.

**Seyed Alireza Modirzadeh** is an Analyst at the TPI Centre.

## Acknowledgements

The authors thank Dan Gardner and Jolien Noels for their contribution to the previous version of this report.

The views in this report are those of the authors and do not necessarily represent those of the host institutions or funders. The authors declare no conflict of interest in preparing this report. For the full disclaimer about the data and information published in this report, see page 34.

This paper was first published in October 2024 by the TPI Centre.

© The authors, 2024

Published under a Creative Commons CC BY-NC licence. Permissions requests should be directed to [gri@lse.ac.uk](mailto:gri@lse.ac.uk).

Suggested citation: Dietz S, Hastreiter N, Jahn V, Amin A, Modirzadeh S (2024) Carbon Performance assessment of oil and gas producers: note on methodology. London: Transition Pathway Initiative Centre, London School of Economics and Political Science.

---

<sup>1</sup> This figure is subject to market-price and foreign-exchange fluctuations and, as the sum of self-reported data by TPI supporters, may double-count some assets.

# Contents

1. The TPI Centre's use of the Sectoral Decarbonisation Approach (SDA)	4
2. Applying the SDA to the oil and gas sector	6
2.1. Deriving the benchmark pathways	6
3. Carbon Performance assessment of oil and gas producers	11
3.1. Calculating company emissions intensities	11
3.2. Emissions reporting boundaries	11
3.3. Data sources and validation	12
3.4. Responding to companies	12
3.5. Presentation of assessment on the TPI Centre website	13
4. Specific considerations for the assessment of oil and gas producers	14
4.1. Measure of emissions intensity	14
4.2. The assessed product	14
4.3. Estimating Scope 3 emissions from use of sold products	16
4.4. Other energy	18
4.5. Incomplete disclosure	18
4.6. Coverage of target	18
5. Discussion	20
5.1. General issues	20
5.2. Issues specific to oil and gas producers	20
References	22
Appendix 1. Emissions and energy content of fossil fuels by product	23
Appendix 2. Energy content of biofuels	26
Appendix 3. IPCC product category definitions	27
Appendix 4. Powerplant efficiency	31
Disclaimer	34

# 1. The TPI Centre's use of the Sectoral Decarbonisation Approach (SDA)

The TPI Centre's Carbon Performance assessments to date have been predominantly based on the Sectoral Decarbonisation Approach (SDA).<sup>2</sup> The SDA translates greenhouse gas emissions targets made at the international level (e.g. under the 2015 UN Paris Agreement) into appropriate benchmarks, against which the performance of individual companies can be compared.

The SDA recognises that different sectors of the economy (e.g. oil and gas production, electricity generation and automobile manufacturing) face different challenges arising from the low-carbon transition, including where emissions are concentrated in the value chain and how costly it is to reduce emissions. Other approaches to translating international emissions targets into company benchmarks have applied the same decarbonisation pathway to all sectors, regardless of these differences [1]. Such approaches may result in suboptimal insights, as not all sectors have the same emissions profiles or face the same challenges: some sectors may be capable of faster decarbonisation, while others require more time and resources.

Therefore, the SDA takes a sector-by-sector approach, comparing companies within each sector against each other and against sector-specific benchmarks, which establish the performance of an average company that is aligned with international emissions targets.

The SDA can be applied by taking the following steps:

- A global carbon budget is established, which is consistent with international emissions targets, for example keeping global warming below 2°C. To do this rigorously, some input from a climate model is required.
- The global carbon budget is allocated across time and to different regions and industrial sectors. This typically requires an Integrated Assessment Model (IAM), and these models usually allocate emissions reductions by region and by sector according to where it is cheapest to reduce emissions and when. Cost-effectiveness is, however, subject to some constraints, such as political and societal preferences, and the availability of capital. This step is therefore driven primarily by economic and engineering considerations, but with some awareness of political and social factors.
- In order to compare companies of different sizes, sectoral emissions are normalised by a relevant measure of sectoral activity (e.g. physical production or economic activity). This results in a benchmark pathway for emissions intensity in each sector:

$$\text{Emissions intensity} = \frac{\text{Emissions}}{\text{Activity}}$$

- Assumptions about sectoral activity need to be consistent with the emissions modelled and therefore should be taken from the same economy-energy modelling where possible.

---

<sup>2</sup> The Sectoral Decarbonisation Approach (SDA) was created by CDP, World Resources Institute (WRI) and the World Wide Fund for Nature (WWF) in 2015. See: <https://sciencebasedtargets.org/resources/files/Sectoral-Decarbonization-Approach-Report.pdf>

- Companies' recent and current emissions intensity is calculated, and their future emissions intensity is based on emissions targets they have set (this assumes companies meet their targets).<sup>3</sup> Together, these establish emissions intensity pathways for companies.
- Companies' emissions intensity pathways are compared with each other and with the relevant sectoral benchmark pathway.

---

<sup>3</sup> Alternatively, companies' future emissions intensity could be calculated based on other data provided by companies on their business strategy and capital expenditure plans.

# 2. Applying the SDA to the oil and gas sector

## 2.1. Deriving the benchmark pathways

The TPI Centre evaluates companies against benchmark pathways, which translate the emission reductions required by the Paris Agreement goals into a measurable trajectory at the sectoral level. For each sector benchmark path, the key inputs are:

- A timeline for greenhouse gas emissions that is consistent with meeting a particular climate target (e.g. limiting global warming to 1.5°C) by keeping cumulative carbon emissions within the associated carbon budget.
- A breakdown of this economy-wide emissions pathway into emissions from key sectors (the numerator of sectoral emissions intensity), including the sector in focus.
- Consistent estimates of the timeline of physical production from, or economic activity in, these key sectors (the denominator of sectoral emissions intensity).

For the oil and gas sector, TPI obtains all three of these inputs from the International Energy Agency (IEA), via its Energy Technology Perspectives 2020 [2], Net Zero by 2050 [3], and World Economic Outlook 2023 [4] reports. The IEA has established expertise in modelling the cost of achieving international emissions targets. It also provides access to the modelling inputs and outputs in a form suitable for applying the SDA.

The IEA's economy-energy model simulates the supply of energy and the path of emissions in different sectors burning fossil fuels, or consuming energy generated by burning fossil fuels, given assumptions about key inputs, such as economic and population growth.

In low-carbon scenarios, the IEA model minimises the cost of adhering to a carbon budget by always allocating emissions reductions to sectors where they can be made most cheaply, subject to some constraints as mentioned above. These scenarios are therefore cost-effective, within some limits of economic, political, social and technological feasibility.

The IEA's work can be used to derive three benchmark emissions pathways, against which companies are evaluated by TPI:

1. **A National Pledges scenario**, which is consistent with the global aggregate of emissions reductions related to policies introduced or under development as of mid-2023. According to the IEA, this scenario does not take for granted that all government targets will be achieved. Instead, it takes a granular, sector-by-sector look at existing policies and measures. This scenario gives a probability of 50% of holding the global temperature increase to 2.4°C by 2100 [4].
2. **A Below 2°C scenario**, which is consistent with the overall aim of the Paris Agreement to limit warming, albeit at the lower end of the range of ambition. This scenario gives a probability of 50% of holding the global temperature increase to 1.7°C by 2100 [4].
3. **A 1.5°C scenario**, which is consistent with the overall aim of the Paris Agreement to hold "the increase in the global average temperature to well below 2°C above pre-industrial levels and to pursue efforts to limit the temperature increase to 1.5°C above pre-industrial levels" [5]. This scenario gives a probability of 50% of holding the global temperature increase to 1.4°C by 2100 [4].

For each scenario, the IEA modelling output provides estimates of the global primary energy supply. It also provides emissions paths associated with the primary energy supply. Emissions from energy supply are then divided by the total supply of energy to derive pathways for the emissions intensity of energy.

Energy supply is defined as the total net calorific energy supply from all energy sources. This includes hydrocarbons, biomass and waste used for energy generation, and energy supplied as electricity generated from fossil fuels, nuclear or renewables. The IEA discloses both primary energy supply and final energy supply. While pure exploration and production (E&P) companies sell primary energy only, integrated companies provide some of their externally sold energy products in the form of final energy. TPI recognises that, in both cases, companies use energy themselves (energy input). For refining and integrated companies, energy is also lost in conversion (energy losses). For some types of final energy, primarily electricity, the energy losses in conversion are important (this issue is addressed in Section 3.1). For liquid fuels, energy input and losses are comparatively small. We adjust the benchmarks as described below.

Relevant energy input and losses, excluding electricity generation, accounted for a difference of approximately 7.8% between primary and final energy in 2017 [6].<sup>4</sup> We assume that this difference becomes negligible in low-carbon scenarios in the long run, as the share of fossil fuels in the primary energy mix goes down. This assumption is strengthened by illustrations of the energy flows in future net zero CO<sub>2</sub> emissions global energy systems in IPCC analysis [7]. Hence, we interpolate in the 1.5°C scenario between the 7.8% difference in 2017 and 0% in 2050. For the Below 2°C and the National Pledges scenarios, we assume a linear functional relationship between the reduction of the difference and the share of fossil fuels in the mix in between 2017 and 2050 in the 1.5°C scenario. This yields a 1.8% difference for the Below 2°C scenario and a 5.5% difference for the National Pledges scenario in 2050.

The aggregate supply of energy products minus energy input and losses is an appropriate measure of activity to benchmark the oil and gas sector against because oil and gas companies are primarily engaged in the supply of energy. Indeed, they are mainly involved in the sale of hydrocarbons. Additionally, they increasingly supply both electrical energy, generated from renewables, fossil fuels, and biofuels. Finally, some oil and gas companies are also involved in the sale of hydrocarbons for plastic and petrochemical production, as well as other non-energy uses. Hydrocarbons destined for non-energy use are excluded from the benchmarks, both in terms of primary energy used for non-energy outputs and associated emissions.

Like other modelling groups, the IEA foresees a low-carbon transition, where decreasing volumes of oil and gas (and coal) are extracted and are replaced by a steadily rising share of zero-carbon sources of energy (Figure 2.1). Thus, companies can reduce their emissions intensity (Figure 2.2) by, among other things, diversifying away from fossil fuels and producing more energy from other sources (e.g. biofuels and renewables).

---

<sup>4</sup> The following categories from the IEA world energy balance were used to calculate the difference: Coke/par.fuel/BKB/PB plants, oil refinery, liquefaction plants, other transformation and energy industry own use.

Figure 2.1. IEA projected global primary energy mix 2021–2050 in different scenarios

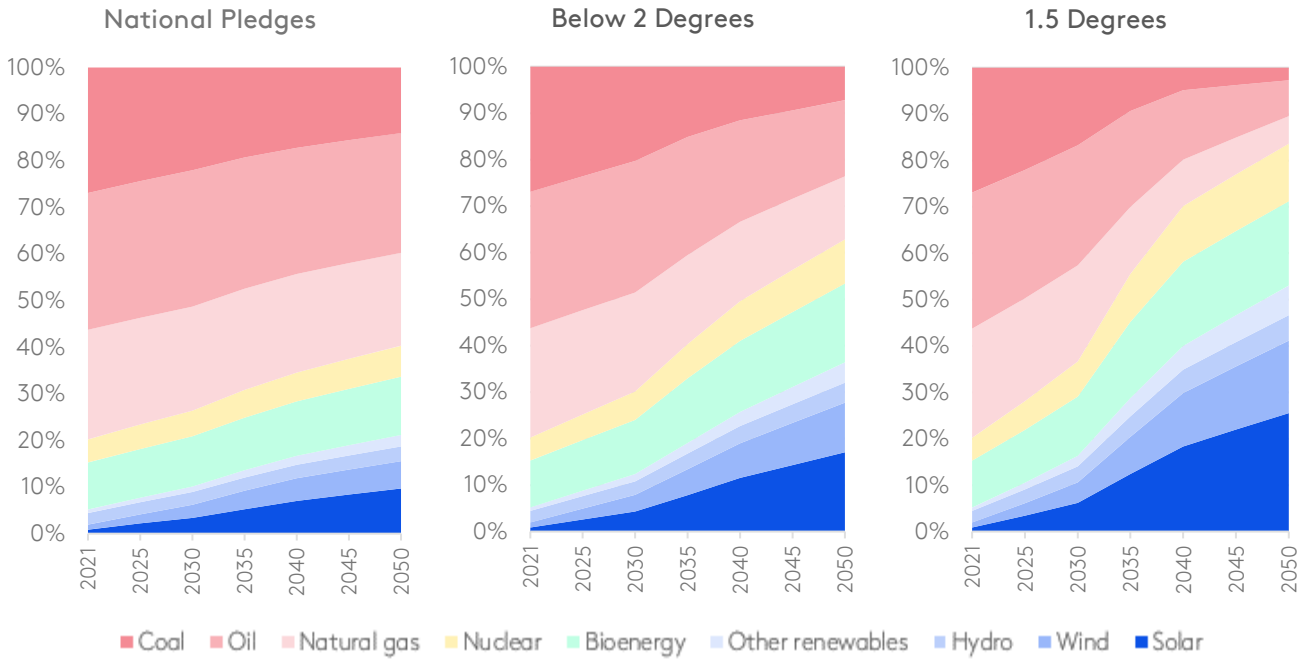


Figure 2.2. Global emissions intensity benchmarks by warming scenario for the oil and gas sector

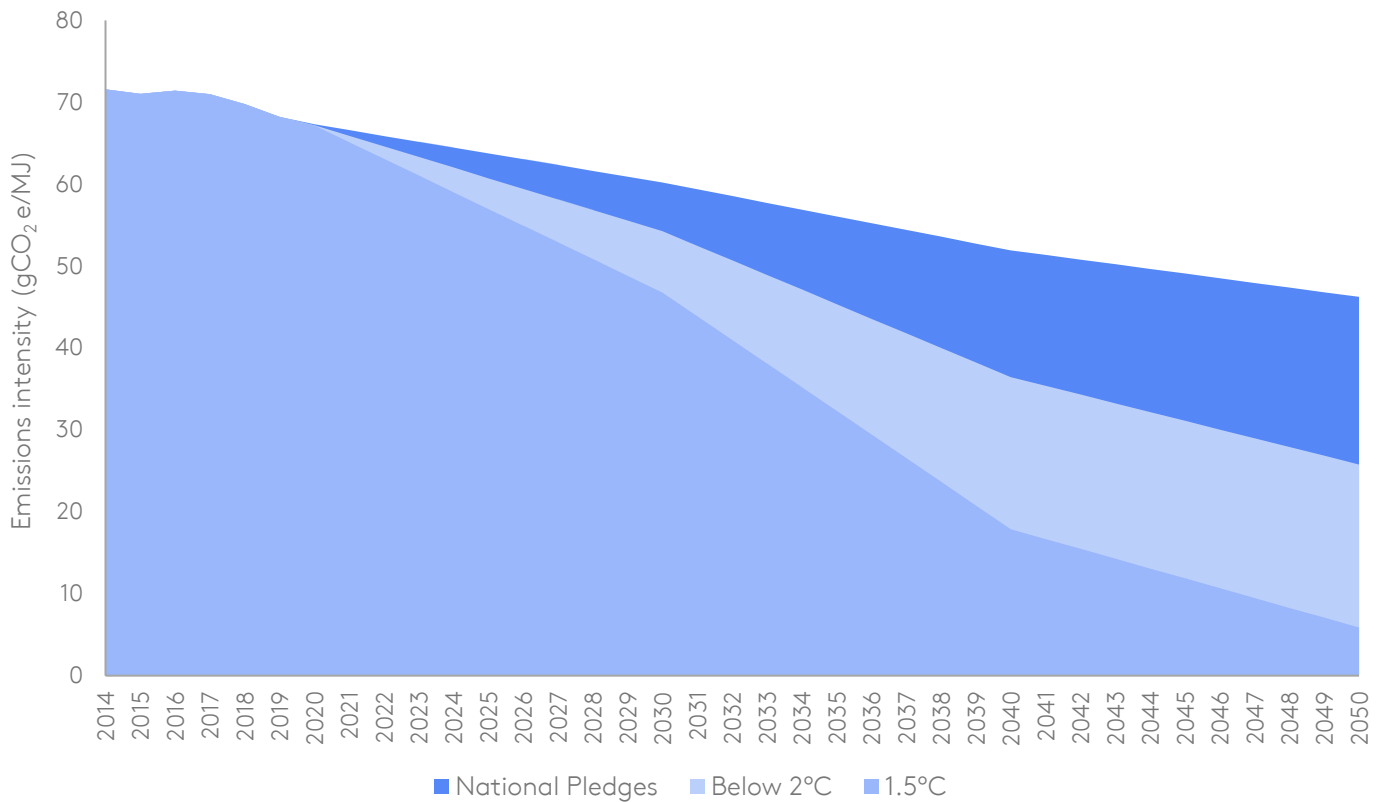


Figure 2.2 shows the benchmark emissions intensity paths for the oil and gas sector, while Table 2.1 provides the underlying data on emissions and primary energy supply. For example, under the 1.5°C scenario in 2030, global direct emissions from primary energy supply are projected to be 24.03 gigatonnes (Gt) of CO<sub>2</sub> (see further explanation beneath Table 2.1).



**Table 2.1.** Projections of primary energy emissions and demand used to calculate emissions intensity benchmarks by warming scenario

	2021*	2022*	2030	2040	2050
<b>National Pledges Scenario</b>					
Total direct CO <sub>2</sub> emissions from primary energy (GtCO <sub>2</sub> )	36.59	36.93	35.13	31.66	29.70
Net process emissions (GtCO <sub>2</sub> )	2.57	2.61	2.91	3.01	2.96
Carbon capture and storage from outside the oil and gas industry (GtCO <sub>2</sub> )**	0.006	0.006	0.006	0.006	0.006
Methane emissions from primary energy (GtCO <sub>2</sub> e)	2.63	2.62	2.49	2.46	2.46
Total primary energy demand (PJ)	624,047	631,978	667,905	691,889	724,958
Share of energy input and losses (%)	7.2%	7.1%	6.6%	6.0%	5.8%
Non-energy use (PJ)	38,165	39,149	47,023	50,966	51,916
Carbon intensity (gCO <sub>2</sub> /MJ)	62.89	62.67	55.88	47.82	42.35
Emissions intensity (gCO <sub>2</sub> e/MJ)	<b>66.60</b>	<b>65.89</b>	<b>60.20</b>	<b>51.93</b>	<b>46.24</b>
<b>Below 2°C scenario</b>					
Total direct CO <sub>2</sub> emissions from primary energy (GtCO <sub>2</sub> )	36.59	36.93	30.77	19.22	12.04
Net process emissions (GtCO <sub>2</sub> )	2.54	2.54	2.51	1.75	1.01
Carbon capture and storage from outside the oil and gas industry (GtCO <sub>2</sub> )	0.042	0.078	0.36	1.65	2.94
Methane emissions from primary energy (GtCO <sub>2</sub> e)	2.51	2.37	1.25	0.71	0.69
Total primary energy demand (PJ)	624,047	631,978	627,662	611,652	622,893
Share of energy input and losses (%)	6.9%	6.7%	5.2%	3.3%	1.4%
Non-energy use (PJ)	38,222	38,897	44,415	47,535	45,292
Carbon intensity (gCO <sub>2</sub> /MJ)	62.85	62.63	51.98	35.14	24.57
Emissions intensity (gCO <sub>2</sub> e/MJ)	<b>65.91</b>	<b>64.62</b>	<b>54.26</b>	<b>36.45</b>	<b>25.78</b>
<b>1.5°C scenario</b>					
Total direct emissions from primary energy (GtCO <sub>2</sub> )	36.59	36.93	24.03	6.47	0
Net process emissions (GtCO <sub>2</sub> )	2.50	2.45	2.11	1.20	0.25
Carbon capture and storage from outside the oil and gas industry (GtCO <sub>2</sub> )	0.070	0.133	0.64	2.46	2.60

Methane emissions from primary energy (GtCO <sub>2</sub> e)	2.48	2.32	1.01	0.76	0.60
Total primary energy demand (PJ)	624,047	631,978	573,066	527,660	540,968
Share of energy input and losses (%)	6.9%	6.6%	4.7%	2.4%	0%
Non-energy use (PJ)	38,221	37,180	41,770	40,360	37,950
Carbon intensity (gCO <sub>2</sub> / MJ)	62.84	62.69	44.75	16.29	4.69
Emissions intensity (gCO <sub>2</sub> e / MJ)	<b>65.13</b>	<b>63.09</b>	<b>46.76</b>	<b>17.88</b>	<b>5.88</b>

\*Methane emissions and emissions intensities for the years 2021 and 2022 are estimated by linearly interpolating between 2020 and 2030.

\*\*Carbon capture and storage outside the oil and gas industry play a minor role in the National Pledges scenario and are expected to remain constant for simplicity.

The IEA's total net direct emissions from primary energy include "process emissions from industry"<sup>5</sup> and carbon captured and stored outside from the oil and gas industry (see section 4.2 for a discussion of the role of customer mitigation actions in the oil and gas sector). The non-energy emissions are excluded from the benchmarks, i.e. 2.11 Gt CO<sub>2</sub>, while the latter are added back in, i.e. 0.64 Gt CO<sub>2</sub>. Under the same scenario, total primary energy supply is projected to be 573,066 petajoules (PJ) in 2030. Energy input and losses account for 4.7%. We exclude final energy demand for non-energy use, i.e. 41,770 PJ. Therefore, the average carbon intensity of an oil and gas producer aligned with the 1.5C path in 2030 is 22.56 Gt CO<sub>2</sub>/504,205 PJ = 44.75 grams of CO<sub>2</sub> per megajoule of energy supplied.

The IEA emissions intensity paths for the oil and gas sector only include CO<sub>2</sub>. Additionally, non-CO<sub>2</sub> greenhouse gases, in the form of methane (CH<sub>4</sub>)<sup>6</sup> are emitted in the process of supplying energy (e.g. fugitive emissions). In 2010, methane emissions from solid fuels and oil and gas were calculated by the Emissions Database for Global Atmospheric Research (EDGAR) to be 105,108 kilo tonnes of CH<sub>4</sub> [8]. In its Special Report on Global Warming of 1.5C, the Intergovernmental Panel on Climate Change (IPCC) provides data via the Integrated Assessment Modelling Consortium (IAMC) data explorer for methane emissions from fossil fuels and industry for scenarios consistent with different temperature increases (e.g. 1.5°C low overshoot, Below 1.5°C, 1.5°C high overshoot, Lower 2°C, Reference) [9]. Using EDGAR's 2010 calculation and applying IPCC's pathways, global methane emissions from energy supply are projected to be 0.036 gigatonnes in 2030 in the 1.5°C scenario. Applying a 100-year global warming potential (GWP) factor of 28 [10], methane emissions will be equivalent to 1.01 gigatonnes of CO<sub>2</sub>. Consequently, the average emissions intensity, including CH<sub>4</sub> emissions, of an oil and gas producer aligned with the 1.5°C scenario in 2030 is (22.56 + 1.01) / 504,205 PJ = 46.76 grams of CO<sub>2</sub>e per megajoule of energy supplied.

<sup>5</sup> This is defined by the IEA as "CO<sub>2</sub> emissions produced from industrial processes which chemically or physically transform materials. A notable example is cement production, in which CO<sub>2</sub> is emitted when calcium carbonate is transformed into lime, which in turn is used to produce clinker" [4].

<sup>6</sup> Other non-CO<sub>2</sub> greenhouse gases such as sulphur dioxide (SO<sub>2</sub>) and hydrofluorocarbons (HFCs) are negligible.

# 3. Carbon Performance assessment of oil and gas producers

## 3.1. Calculating company emissions intensities

TPI Centre's Carbon Performance assessments are based on public disclosures by companies. Disclosure that is useful to our assessments tends to come in one of three forms:

1. **Emissions Intensity.** Some companies disclose their emissions intensity and some companies have also set future emissions targets in intensity terms. Provided these are measured in a way that can be compared with the benchmark scenarios and with other companies (e.g. in terms of scope of emissions covered and measure of activity chosen), these disclosures can be used directly. In some cases, adjustments need to be made to obtain estimates of emissions intensity on a consistent basis. The necessary adjustments will generally involve sector-specific issues (see below).
2. **Absolute emissions.** Some companies disclose their emissions on an absolute (i.e. un-normalised) basis. Provided emissions are appropriately measured, and an accompanying disclosure of the company's activity can be found that is also in the appropriate metric, historical emissions intensities can be calculated.
3. **Absolute emission targets.** Some companies set future emissions targets in terms of absolute emissions. This raises the particular question of what to assume about those companies' future activity levels. The approach taken by the TPI centre is to assume company activity increases at the same rate as the sector as a whole (i.e. assuming a constant market share), using sectoral growth rates from the same model that is used to derive the benchmark pathways, in order to be consistent. While companies' market shares are unlikely to remain constant, there is no obvious alternative assumption that can be made, that treats all companies consistently. Sectoral growth rates from the National Pledges Scenario (based on IEA's Stated Policies Scenario) are used.

The length of companies' emissions intensity pathways will vary depending on how much information companies provide on their historical emissions, as well as the time horizon for their emissions reduction targets.

## 3.2. Emissions reporting boundaries

Companies disclose emissions using different organisational boundaries. There are two high-level approaches: (i) the equity share approach; and (ii) the control approach, within which control can be defined as financial or operational. Companies are free to choose which organisational boundary to set in their voluntary disclosures, and there is variation across the companies assessed by the TPI centre.

The TPI Centre accepts emissions reported using any of the above approaches to setting organisational boundaries, as long as:

- The boundary that has been set appears to enable a representative assessment of the company's emissions intensity; and
- The same boundary is used for reporting company emissions and activity, to obtain a consistent estimate of emissions intensity.

Currently, limiting the assessment to one particular type of organisational boundary would severely restrict the breadth of companies that can be assessed.

When companies report historical emissions or emissions intensities using both equity share and control approaches, a reporting boundary is chosen based on which method provides the longest available time series of disclosures or is the most consistent with disclosure on activity and any targets.

### 3.3. Data sources and validation

All TPI Centre's data are based on companies' own disclosures. The sources for the Carbon Performance assessment include responses to the annual CDP questionnaire, as well as companies' own reports, e.g. sustainability reports.

Given that our Carbon Performance assessment is both comparative and quantitative, it is essential to understand exactly what the data in company disclosures refer to. Company reporting varies not only in terms of what is reported but also in terms of the level of detail and explanation provided. The following cases can be distinguished:

- Companies that provide data in a suitable form and with enough detail for analysts to be confident that appropriate measures can be calculated or used.
- Companies that provide enough detail in their disclosures, but not in a form that is suitable for the assessment (e.g. they do not report the measure of company activity needed). These companies cannot be included in the assessment.
- Companies that do not provide enough detail on the data disclosed (e.g. the company reports an emissions intensity estimate but does not explain precisely what it refers to). These companies are also excluded from the assessment.
- Companies that do not disclose their greenhouse gas emissions or activity.

Once a preliminary Carbon Performance assessment has been made, it is subject to the following procedure to provide quality assurance:

- **Internal review:** the preliminary assessment is reviewed by an analyst who was not involved in the original assessment.
- **Company review:** the reviewed assessment is sent to the company, which has the opportunity to review it and confirm the accuracy of the disclosures used. This review includes all companies, including those who provide unsuitable or insufficiently detailed disclosures.
- **Final assessment:** feedback from the company is reviewed and incorporated if it is considered appropriate. Only information in the public domain can be accepted as a basis for any change.

### 3.4. Responding to companies

Giving companies the opportunity to review their Carbon Performance assessments is an integral part of the TPI Centre's quality assurance process. Each company receives its draft assessment and the data that underpins the assessment, offering them the opportunity to review and comment on the data and assessment. We also allow companies to contact us at any point to discuss their assessment.

If a company seeks to challenge its result or representation, our process is as follows:

- The TPI Centre reviews the information provided by the company. At this point, additional information may be requested.
- If it is concluded that the company's challenge has merit, the assessment is updated.
- If it is concluded that there are insufficient grounds to change the assessment, the original assessment is published.
- If the company requests an explanation regarding its feedback after the publication of its assessment, the TPI Centre explains the decisions taken.
- If a company requests an update of its assessment based on data publicly disclosed after the research cut-off date communicated to the company, the new disclosure is noted. For corrections,

we take this into consideration immediately, whereas general assessment updates will be incorporated in the next assessment cycle.

If a company chooses to further contest the assessment and reverts to legal means to do so, the company's assessment is withheld from the TPI Centre website and the company is identified as having challenged its assessment.

### **3.5. Presentation of assessment on the TPI Centre website**

The results of the Carbon Performance assessments are posted on the TPI Centre's online tool ([www.transitionpathwayinitiative.org/tpi/sectors](http://www.transitionpathwayinitiative.org/tpi/sectors)). On each company page, its emissions intensity pathway is plotted on the same chart as the benchmark pathways for the relevant sector. Different companies can also be compared on the toolkit main page, with the user free to choose which companies to include in the comparison.

# 4. Specific considerations for the assessment of oil and gas producers

## 4.1. Measure of emissions intensity

In applying the SDA to the oil and gas sector, a key consideration is that the vast majority of lifecycle emissions stem from use of companies' sold products, i.e. burning oil and gas to provide energy for buildings, electricity generation, industry and transport. Therefore, the scope of a company assessment should include emissions from use of sold products, as well as the contribution from direct and indirect operational emissions (i.e. Scope 1 and 2).

Hence, in the oil and gas sector, the specific measure of emissions intensity used by TPI is:

- Scope 1, 2 and 3 (use of sold product) greenhouse gas emissions from energy products sold externally in units of grams of CO<sub>2</sub> equivalent (gCO<sub>2e</sub>) per mega joule (MJ).

"Energy products sold externally" is defined as the total net calorific energy supply from all fuels including hydrocarbons, biomass and waste, plus energy supplied as electricity generated from fossil fuels, nuclear or renewables.

## 4.2. The assessed product

Companies in the oil and gas sector are active at different levels of the value chain. They range from pure E&P companies focused on extraction of raw hydrocarbons, to more downstream-focused integrated companies that both extract and process these hydrocarbons. They also typically have differing levels of non-energy petrochemical production, processing hydrocarbons into products such as plastics and fertilisers, and diversification into renewable energy.

TPI segments energy products sold externally into five categories (see Figure 4.1). The relative importance of these categories varies widely according to company structure:

1. Sales of primary, 'unrefined' products. This principally includes crude oil, NGLs (collectively known as liquids) and natural gas but can also include coal. When only production of primary products is disclosed, as opposed to sales of primary products, further assumptions need to be made to obtain external sales. If an integrated oil and gas producer does not disclose external sales of primary product, we assume all liquid production is consumed internally by their downstream refinery activities, or, if refinery throughput data is available, we assume that the amount of externally sold primary liquids equals the difference between primary liquids production and refinery throughput. Additionally, we assume that all-natural gas production is sold externally unless stated otherwise. When a pure E&P company discloses only liquid production numbers and no sales numbers, we assume that all produced liquids are sold externally. Royalty production owned by host governments is excluded from assessed product.
2. Sales of refined products. Liquid production typically must be refined before it can be used as an energy product. Integrated companies refine both their internal, "upstream" production and liquids purchased externally. Some companies exclusively focus on refining. When no explicit sales data is available, we assume that refinery production equals sales.
3. Sales of finished products. Refined liquid products, either internally produced or purchased from external suppliers, are blended and distributed as fuel to end-customers (i.e. at petrol stations).

4. Sales of physically traded products. Some integrated oil and gas companies sell energy products (natural gas and liquids) originally extracted by third parties without transforming them.
5. Sales of other energy products. Some oil and gas companies are diversifying into supplying electricity and heat generated from fossil fuels and low-carbon sources, including biofuels, solar and wind.

The objective is to only measure emissions and supply from energy products sold externally so that emissions arising from any other activities that companies are engaged in are excluded, otherwise, companies' emissions intensity may be misestimated. Some oil and gas products have a non-energy use, mainly in the plastics and petrochemicals industry. In excluding emissions and supply from non-energy products, it is important to make a distinction between energy and non-energy use of fuels.

According to Richard Heede [11],<sup>7</sup> 8.02% of carbon in produced oil<sup>8</sup> and 1.86% of carbon in gas is permanently stored through non-energy use (measured in energy equivalent units) such as for plastics and petrochemicals. Using carbon storage factors instead of non-energy outputs allows to take into account that some non-energy outputs such as plastics are burned at the end of their lifecycle for energy. This is also reflected in the benchmark because some non-energy products feed back into primary energy in the form of waste. Hence, when calculating a company's use of sold product emissions and energy content, an adjustment is made to reflect the portion of hydrocarbon output destined for non-energy uses. While companies disclose the production of individual non-energy products, the total is not typically stated and therefore TPI must make an assumption. For companies where the sum of disclosed non-energy products such as naphtha or lubricants is equal to or higher than 10% of liquids sold, no adjustment is made. Where it is less than 10%, an adjustment is made so that a minimum of 10% of liquid production is treated as non-energy. The adjustment is made to the sum of all liquid energy products sold externally by a company.

Companies disclose production/sales outputs in a range of different units which TPI must convert into a consistent measure of energy (MJ). Typically, the output is disclosed in either:

1. **Volume:** barrels, cubic meters/feet etc. for gas and liquids
2. **Weight:** e.g. in tons/tonnes
3. **Energy:** e.g. in Boe, Btu (British thermal unit), MWh (megawatt hour), heat, electricity.

We convert the amount of product sold into a unit of energy measured in joules predominantly using the IPCC's net calorific values for each energy product category. Assigning an appropriate IPCC category to a company's energy product is relatively straightforward in most cases, but wherever there is some ambiguity, TPI references IPCC's product category definitions to determine the most appropriate classification (see Appendix 3).

Typically, companies disclose quantities sold in a unit other than weight and therefore the disclosed unit is either converted into weight or straight into joules depending on the original unit of disclosure and fuel type. For volume disclosures TPI uses energy density figures expressed in tonnes per barrel published by the UN [12]. See Appendix 1 for more details on the conversion ratios.


Finally, to calculate the assessed product, all categories of energy products sold externally are added together (see Figure 4.1).

---

<sup>7</sup> The average carbon storage factors from Richard Heede [11] are based on US-only data. We assume that the US average is representative of the world average.

<sup>8</sup> This includes crude oil, natural gas liquids, naphtha, liquefied petroleum gases, motor gasoline aviation gasoline, jet kerosene, other kerosene, gas/diesel and fuel oil.

Figure 4.1. Calculating 'Assessed Product': all energy products sold externally

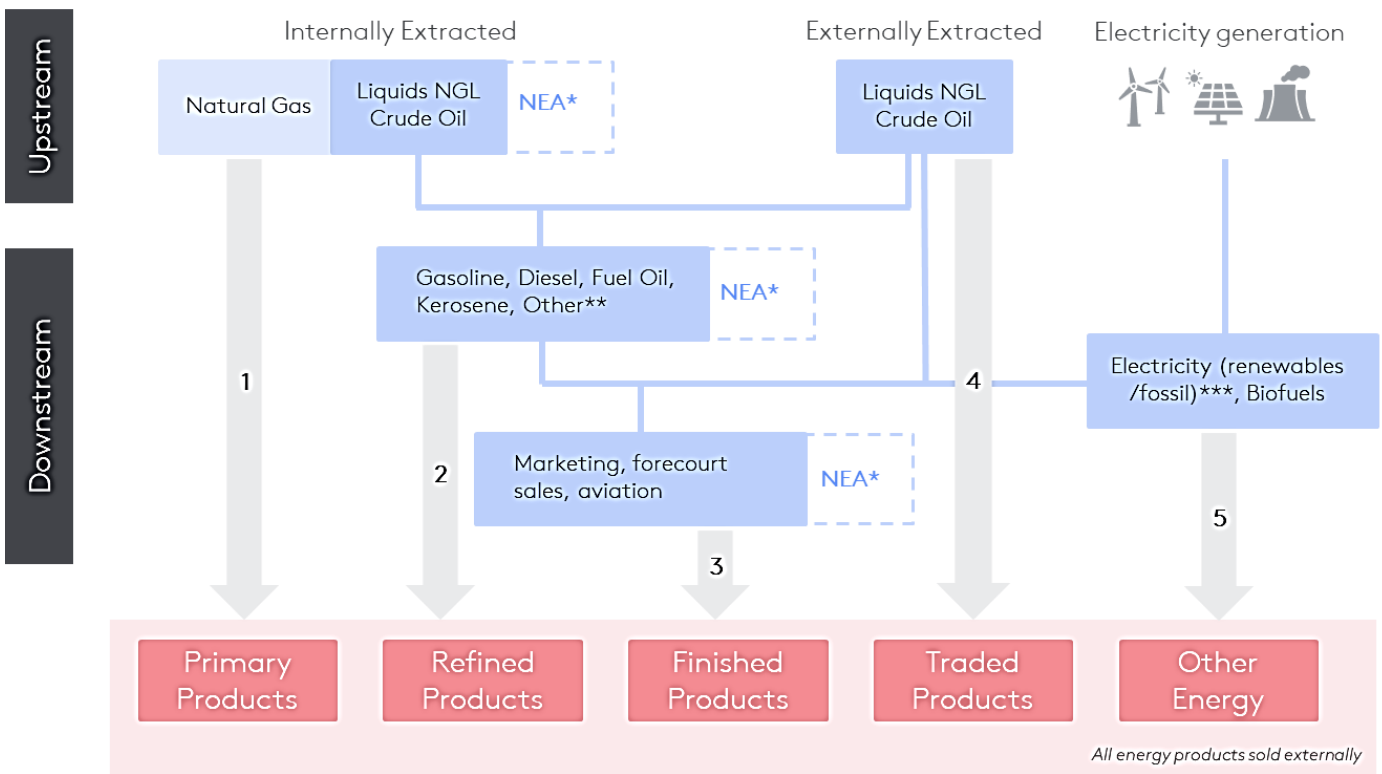

\* NEA = Non-energy adjustment

\*\* Product basket (50% Naphtha/LPGs)

\*\*\* Energy only. Electricity emissions accounted for within Scope 1 and 2 disclosure


### 4.3. Estimating Scope 3 emissions from use of sold products

While most oil and gas companies disclose their Scope 1 and 2 emissions, only a few currently disclose their Scope 3 'use of sold product' emissions and none discloses it on a basis consistent with TPI's assessed product methodology. Hence, TPI has developed a methodology to calculate emissions from use of sold products.

The emissions content of fossil fuels varies by product (see Figure 4.2). TPI analysis uses product CO<sub>2</sub> emissions and energy factors from the 2006 IPCC Guidelines for National Greenhouse Gas Inventories (see Appendix 1) [13].



Figure 4.2. The CO<sub>2</sub> intensity of disclosed energy products

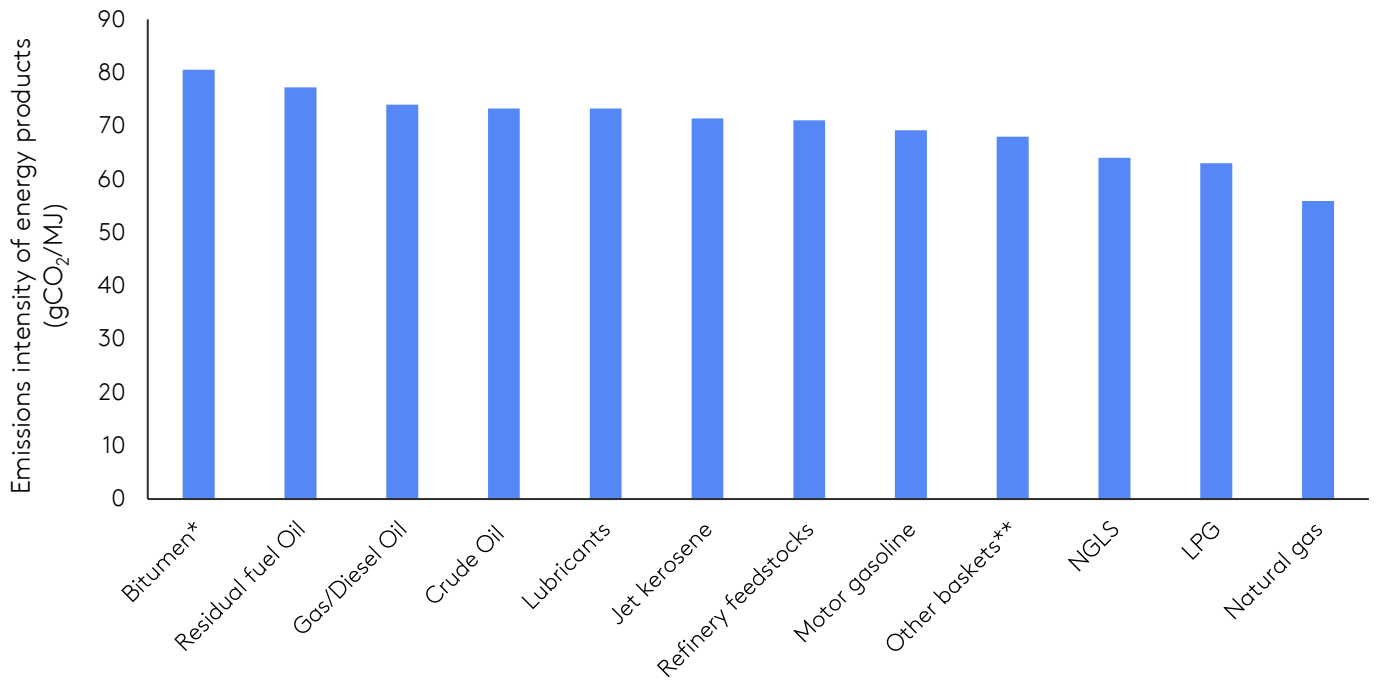


\* Bitumen is classified as energy product when it is disclosed as primary product and a non-energy product when it is disclosed as a refined product

\*\* Other basket is 50% naphtha and 50% LPGs based on IEA analysis of residual fuels [6]

After performing any necessary non-energy adjustments on the calculated amounts of energy, the energy of the remaining “assessed product” is converted into emissions by applying each fuel-specific emissions factor published by the IPCC. For a general schematic please refer to Figure 4.3.

Figure 4.3. Scope 3 methodology schematic

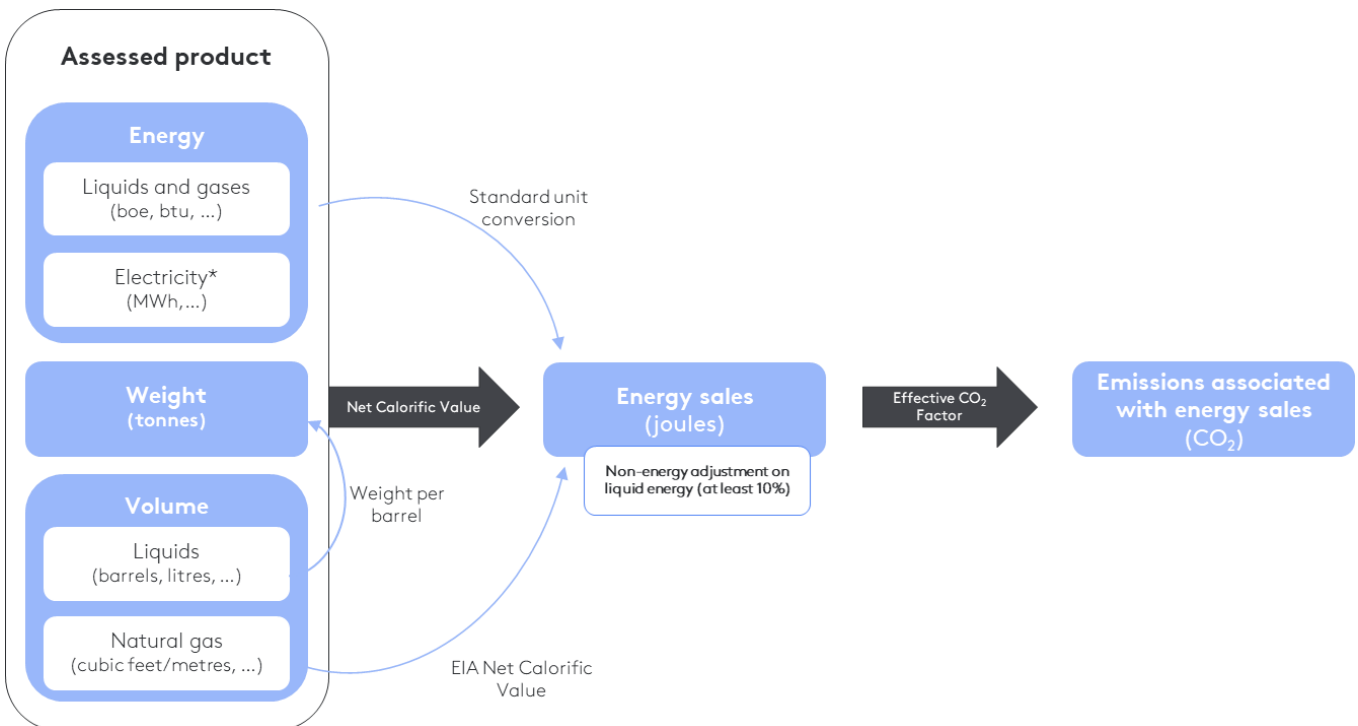

\* For electricity coming from fossil fuels, the implied primary energy is calculated using average country-level power plant efficiency per plant type.

## 4.4. Other energy

Oil and gas companies also sell other forms of energy, most notably in the form of biofuels and electricity and heat (both from fossil fuels and renewables).

Biofuels can either be sold in their pure form or blended with refined oil products like motor gasoline. When sold in its pure form the energy is calculated based on the appropriate energy density factor and Scope 3 emissions from use of sold products are assumed to be zero. Some companies blend their biofuel production into one or more of their finished fuels (typically motor gasoline). In order to obtain an estimate of Scope 3 use of sold product emissions for the company's particular blend, we proceed as follows. First, both the biofuel and the finished fuel are converted into their respective weights,<sup>9</sup> if not already disclosed in a weight unit. Second, the amount of biofuel is subtracted from the amount of gasoline sold to obtain the biofuel-based "emissions-free" proportion and the fossil-based "emissions-intensive" proportion. Both weights are then converted into energy using TPI's standard methodology, but Scope 3 emissions from use of sold products are only calculated for the fossil-based proportion. In most assessments, TPI uses biofuel-specific energy content factors published by the European Commission (see Appendix 2). However, TPI acknowledges that biofuels have a large spread of energy content and might in some cases accept an energy factor for biofuels disclosed by the company, provided that this factor has been assured by a third party.

Electricity sales are usually disclosed in watt-hours. Based on average country-level power plant efficiency per fossil plant type (see Appendix 4), the primary energy input implied from electricity output is calculated in joules. The primary energy equivalent from electricity is only calculated for electricity generated from fossil fuels. Electricity from renewables is taken directly, no fossil fuel equivalent is calculated, consistent with IEA methodology and the benchmarks. If a company discloses the primary energy going into electricity generation, we prefer using that data. Associated Scope 3 use of sold products emissions are not calculated, because, regardless of whether the source of the energy is burning fossil fuels or renewables, the emissions will already be accounted for in Scope 1 and 2 disclosure.

Some companies assessed by TPI sell large amounts of fossil fuel based (i.e. high carbon) electricity produced by third parties. When the share of such third-party generation exceeds 10% of the company's total sold energy, further research is needed. Where necessary, TPI includes emissions associated with this third-party generation in its assessment to maintain comparability with the absolute GHG emissions included in the benchmarks. Where these emissions are not directly disclosed by the company, TPI may estimate them using regional and/or global GHG electricity grid intensities.

## 4.5. Incomplete disclosure

Most oil and gas producers appear to disclose emissions from all their operations, albeit employing different reporting boundaries, but some explicitly do not, or it is unclear whether the disclosure is comprehensive. When it is either explicitly incomplete or unclear, a further assessment is made to determine whether the omission of some facilities would bias the emissions intensity assessment. Ultimately, we make a judgement, in line with the principles set out in Section 2.3 above, on whether a reliable Carbon Performance assessment can be made from existing disclosure.

## 4.6. Coverage of target

There are various types of targets that oil and gas companies disclose, but they can be broadly categorised into emissions intensity targets and absolute emissions targets. Absolute emissions targets are expressed in terms of a decrease in the total amount of emissions a company aims to emit by a certain date. By contrast, emissions intensity targets are expressed in emissions per unit of output and make no direct reference to total emissions. Targets can cover different scopes of emissions and apply only to specific operations, or to the whole organisation.

---

<sup>9</sup> We use weight for the following reasons: (i) the volume of a mixture of two liquids is different from the volume of the two liquids separately; (ii) gasoline and biofuels tend to have different energy densities, a blend with a high degree of biofuels can contain significantly less energy compared to a blend with a lower biofuel content. Hence, we do not adjust on energy basis either.

TPI incorporates different types of target into its Carbon Performance assessment. In particular, we are faced with the following permutations:

- **Absolute targets relating to operational emissions (either Scope 1 or Scope 1 and 2):** as these targets only cover part of total emissions, assumptions are required to calculate how emissions outside the scope of the target evolve. Consistent with the approach used in other TPI sectors, we assume the emissions intensity of activities outside the scope of the target remains constant at the level in the latest disclosure year. To convert an absolute emissions target into an intensity target, we make an assumption about the future growth of energy sold externally by the company. Consistent with the approach adopted in other TPI sectors, we assume that a company's energy sales grow in line with IEA's global forecasts.
- **Absolute Scope 1, 2 and 3 or Scope 3 target:** similar to the above, we make an assumption about the future growth of energy sold externally by the company to convert an absolute emissions target into an intensity target and assume the emissions intensity of activities outside the scope of the target remains constant at the level in the latest disclosure year. If both an absolute and intensity target are disclosed, we verify that both are consistent with/complement each other. If so, we prefer the intensity target to avoid assumptions regarding the company's future energy output, if not, further research is needed to accurately reflect a company's decarbonisation pathway.
- **Emissions intensity targets applying to Scope 1 and 2 only:** these are disclosed, or can be expressed as, percentage reductions against a base year. TPI applies the percentage reduction to the Scope 1 and 2 emissions intensity calculated for the designated base year and assumes Scope 3 use of sold products emissions remain constant at the intensity in the latest year of disclosure.
- **Comprehensive intensity targets including Scope 1, 2, and 3 use of sold products emissions:** these are usually expressed as percentage reductions against a base year. We apply the same percentage that is either explicitly or implicitly disclosed and apply it to the TPI-calculated intensity in the designated base year.

As mentioned, some companies set targets that only apply to Scope 1 emissions, or a part of Scope 1 emissions, as opposed to Scope 1 and 2 emissions from energy supply as a whole. In the case of a partial absolute emissions target, the target intensity for the specified part of emissions is calculated by applying the target to the emissions and dividing that by projected energy sales (calculated using the global growth projection of IEA). Further, it is assumed that the intensities of all other relevant emissions remain constant at the level in the latest year of disclosure. In case of a partial Scope 1 emissions intensity target, the total emissions intensity is calculated by applying the target to the intensity of the specified emissions and assuming that the emissions intensity of all other relevant emissions (other Scope 1, 2 and 3 emissions) remains unchanged. Additionally, some companies disclose Scope 3 targets only covering part of their energy sales. In this case we apply the target to the Scope 1, 2 and 3 emissions of those externally sold energy products covered by the target. We assume that the intensity of energy sales not covered by the target remains the same as the level of the latest disclosure, and that the proportion of energy covered by the target compared to that not covered by the target remains constant from the latest disclosure as well (i.e. the energy sales mix remains constant).

Some companies disclose net targets. Unlike gross targets, net targets include emissions offsets and/or negative emissions, either within company boundaries or outside. Currently, TPI accepts both types of targets and does not make an explicit distinction between both. Although we recognise that there are additional risks related to relying heavily on offsetting, in principle it is a cost-effective mechanism to reduce emissions. Moreover, no company currently discloses sufficient detail on the contribution from offsets to their overall targets.

Some companies disclose a target range. In this case the midpoint value is used.

# 5. Discussion

This note has described the methodology followed by the TPI Centre in carrying out the Carbon Performance assessment of oil and gas companies.

The Carbon Performance assessment is designed to be robust yet easy to understand and use. There are inevitably many nuances surrounding each company's individual performance, how it relates to the benchmarks, and why. Investors may wish to dig deeper into companies' assessments in their engagements with them to better understand these.

## 5.1. General issues

The methodology builds on the SDA, which compares a company's emissions intensity with sector-specific benchmarks that are consistent with international climate targets (i.e. limiting global warming to 1.5°C, well below 2°C, and the sum of National Pledges).

TPI Centre mainly uses the modelling of the IEA to calculate its emissions intensity benchmarks. Such models have a number of advantages, but they are also subject to limitations, like all other economy-energy models. In particular, model projections often turn out to be wrong. The comparison between companies and the benchmark pathways might then be inaccurate. Models tend to be regularly updated with the aim of improving their accuracy, and the TPI Centre updates its benchmark pathways accordingly. Nevertheless, in such a forward-looking exercise there is no way to avoid the uncertainty created by projecting into the future.

We use companies' self-reported emissions and activity data to derive emissions intensity pathways. While much of this data is audited, the emissions intensity estimates can only be as accurate as the underlying disclosures.

Estimating the historical and especially the future emissions intensity of companies involves a number of assumptions. Therefore, it is important to bear in mind that, in some cases, the emissions pathway drawn for each company is an estimate made by the TPI Centre, based on information disclosed by companies, rather than the companies' own estimate or target. In other cases, the information disclosed by companies is sufficient on its own to completely characterise the emissions intensity pathway.

## 5.2. Issues specific to oil and gas producers

The principal challenge in the oil and gas sector, relative to other sectors whose Carbon Performance TPI is assessing, is the absence of (consistent) disclosures of Scope 3 emissions from the use of sold products. Consequently, TPI has developed a methodology to calculate Scope 3 emissions based on energy sales. This methodology requires detailed information on externally sold energy in physical/energy units, as well as organisational boundaries and disclosure basis so that we can match Scope 1 and 2 emissions with Scope 3 emissions associated with energy sales on a consistent basis. However, some companies disclose operational emissions and product volumes using different reporting boundaries. TPI accepts both operational control and equity share boundaries in its assessments, but the inconsistency between the scope of disclosed operational emissions and product volumes makes it inaccurate to add Scope 3 use of sold products emissions to operational emissions. For these companies, TPI has attempted to adjust for this by scaling operational emissions using the ratio between production stated on an equity basis and on a 100% operational control basis.

Additionally, TPI's assessments are complicated by inconsistent disclosure of energy products. Some companies disclose large quantities of traded products. We believe this activity is widespread among integrated players but may not be fully disclosed. Without disclosure of an oil trading business, for example, the proportion of oil-based products in the mix is lowered, flattering emissions intensity results. Whilst operationally very different to fossil fuel extraction and refining activities, trading carbon-intensive products also creates transition risks, given the dependence of companies' revenues on underlying

carbon-intensive products. Excluding them opens up a decarbonisation strategy that would simply transfer transition risk to an unassessed activity without any decarbonisation taking place.

We do aim to exclude “financial trading”, in which no change in ownership of the underlying asset takes place. However, it is not straightforward to distinguish this from other forms of trading based on public disclosure. We encourage companies to explicitly disclose financial trading volumes.

Sales from low-carbon initiatives are also inconsistently disclosed. Several companies highlight initiatives to diversify into lower-carbon energy sources, such as biofuels, solar and wind power generation, within published investor materials. Often these companies only disclose generating capacity values as opposed to sales. However, as the energy produced by these initiatives is a small proportion of the total currently, it is rarely systematically disclosed.

Currently no company explicitly discloses the total proportion of sales destined for non-energy uses and when they do it is often unclear how to estimate their energy content, in particular in the case of chemicals. In the absence of this disclosure, we are forced to assume 8.02% of carbon in produced oil and 1.86% of carbon in gas is non-energy across the rest of the sector. In reality, the proportion of sales destined for non-energy uses is likely to vary widely by company.

Some companies do also not disclose Scope 1 and 2 emissions from chemicals separately from Scope 1 and 2 emissions associated with the supply of energy products. For companies with a small chemicals business, TPI has assumed that this would have a negligible impact on their overall emissions intensity. However, some companies have a large interest in chemical activities. Hence, for those companies where TPI cannot make an appropriate adjustment, the assessments cannot be finalised.

Finally, some companies have set Scope 3 emissions reduction targets which explicitly rely on future customer mitigation actions, such as the implementation of carbon capture and storage (CCS) technology and the purchase of carbon offsets. TPI methodology is based on the SDA, which considers an oil and gas company’s own transition efforts; these actions go beyond TPI’s assessment boundary. More importantly, no established mechanisms currently exist to track them. TPI does therefore not reflect targets relying on customer mitigations actions in its company assessments and has also excluded them from the benchmarks to ensure consistency. TPI benchmarks represent the transition efforts which oil and gas companies’ have to make independent of CCS use by customers.

We believe that these issues, in isolation, do not impact the emissions intensity results sufficiently to undermine the analysis. For example, as operational emissions are a small proportion of oil and gas companies’ total emissions, restating them on an equity share basis (to match Scope 3 calculations) would have a modest impact on overall intensity.

Even with consistent and full disclosure of product volumes, there are further, inherent limits to the accuracy of the methodology. Issues include the application of the appropriate IPCC category. Even with much more granular product disclosure, it may not be possible to match IPCC categories exactly. Applying a standard product basket (50% naphtha / 50% LPGs) to all “other” categories can also be problematic. The emissions and energy generated by energy products are inherently variable. The IPCC emissions factors for unrefined products (e.g. crude oil) can range  $\pm 5\%$ .

# References

- [1] Randers J (2012) Greenhouse gas emissions per unit of value added ('GEVA'): a corporate guide to voluntary climate action. *Energy Policy* 48: 46–55.
- [2] International Energy Agency [IEA] (2017) *Energy Technology Perspectives*.
- [3] IEA (2021) *Net Zero by 2050: A Roadmap for the Global Energy Sector*.
- [4] IEA (2023) *World Energy Outlook*.
- [5] UNFCCC, Paris Agreement, 2015.
- [6] IEA (2019) *World Energy Balance 2019*. OECD.
- [7] Clarke L, Wei Y, De La Vega Navarro A, Garg A, Hahmann A, Khennas S et al. (2022) "2022: Energy Systems" In IPCC (2022) *Climate Change 2022: Mitigation of Climate Change. Contribution of Working Group III to the Sixth Assessment Report of the Intergovernmental Panel on Climate Change* [Shukla P, Skea J, Slade R et al. (eds.)]. Cambridge, UK and New York, NY: Cambridge University Press. doi: 10.1017/9781009157926.008.
- [8] Janssens-Maenhout G, Crippa M, Guizzardi D, Muntean M, Schaaf E, Dentener F et al. (2017) "EDGAR - Global Greenhouse Gases Emissions EDGAR v4.3.2," Global Atlas of the three major Greenhouse Gas Emissions for the period 1970-2012. *Earth System Science Data*.  
[http://edgar.jrc.ec.europa.eu/overview.php?v=432\\_GHG&SECURE=123](http://edgar.jrc.ec.europa.eu/overview.php?v=432_GHG&SECURE=123)
- [9] Huppmann D (2019) IAMC 1.5°C Scenario Explorer and Data hosted by IIASA. Zenodo. doi: 10.5281/zenodo.3363345.
- [10] Myhre G, Shindell D, Bréon F, Collins W, Fuglestvedt J, Huang J et al. (2013) "Anthropogenic and Natural Radiative Forcing Supplementary Material". In: *Climate Change 2013: The Physical Science Basis. Contribution of Working Group I to the Fifth Assessment Report of the Intergovernmental Panel on Climate Change* [Stocker T, Qin D, Plattner G et al. (eds.)].  
[https://www.ipcc.ch/site/assets/uploads/2018/07/WGI\\_AR5.Chap\\_.8\\_SM.pdf](https://www.ipcc.ch/site/assets/uploads/2018/07/WGI_AR5.Chap_.8_SM.pdf)
- [11] Heede R (2019) Carbon Majors : Updating activity data, adding entities, & calculating emissions: A Training Manual. Climate Accountability Institute.
- [12] United Nations (2016) *Energy Statistics Yearbook*.
- [13] IPCC (2006) "2006 IPCC Guidelines for National Greenhouse Gas Inventories", Prepared by the National Greenhouse Gas Inventories Programme, Eggleston H.S., Buendia L., Miwa K., Ngara T. and Tanabe K. (eds). Published: IGES, Japan.
- [14] US Energy Information Administration (2019) Energy Conversion Calculators - Energy Explained, Your Guide To Understanding Energy. Web Page.  
[www.eia.gov/energyexplained/index.php?page=about\\_energy\\_conversion\\_calculator](http://www.eia.gov/energyexplained/index.php?page=about_energy_conversion_calculator)
- [15] General Electric [GE] (2016) *GE Global Power Plant Efficiency Analysis*.
- [16] US Energy Information Administration (2017) *Electric Power Annual 2017*.

# Appendix 1. Emissions and energy content of fossil fuels by product

	Net calorific value (terajoule/tonnes)	Effective CO <sub>2</sub> emissions factor (tonnes CO <sub>2</sub> /terajoule)	Weight of a barrel of specific fuel (tonnes/barrel)	Net calorific value (megajoule/mCF)
Crude oil	0.042	73.3	0.137	-
Orimulsion	0.028	77.0	-	-
Natural gas liquids	0.044	64.2	0.096	-
Motor gasoline	0.044	69.3	0.118	-
Aviation gasoline	0.044	70.0	0.116	-
Jet gasoline	0.044	70.0	0.121	-
Jet kerosene	0.044	71.5	0.129	-
Other kerosene	0.044	71.9	0.129	-
Shale oil	0.038	73.3	-	-
Gas/diesel oil	0.043	74.1	0.138	-
Residual fuel oil	0.040	77.4	0.151	-
Liquified petroleum gases	0.047	63.1	0.086	-
Ethane (used to produce plastics)	0.046	61.6	0.059	-
Naphtha	0.044	73.3	0.114	-
Bitumen	0.040	80.7	0.165	-
Lubricants	0.040	73.3	0.143	-
Petroleum coke	0.033	97.5	0.181	-
Refinery feedstocks	0.043	73.3	0.135	-
Other oil refinery gas	0.050	57.6	0.125	-

	Net calorific value (terajoule/tonnes)	Effective CO <sub>2</sub> emissions factor (tonnes CO <sub>2</sub> /terajoule)	Weight of a barrel of specific fuel (tonnes/barrel)	Net calorific value (megajoule/mCF)
Paraffin wax	0.040	73.3	0.127	-
White spirit and SBP	0.040	73.3	0.129	-
Other petroleum products	0.040	73.3	0.145	-
Anthracite	0.027	98.3	-	-
Coking coal	0.028	94.6	-	-
Other bituminous coal	0.026	94.6	-	-
Sub bituminous coal	0.019	96.1	-	-
Lignite	0.012	101.2	-	-
Oil shale and tar sands	0.009	106.7	-	-
Brown coal briquettes	0.021	97.5	-	-
Patent fuel	0.021	97.5	-	-
Coke over coke and lignite coke	0.028	107.1	-	-
Gas coke	0.028	80.7	-	-
Coal tar	0.028	44.4	-	-
Gas works gas	0.029	44.4	-	-
Oil works gas	0.039	-	-	-
Blast furnace gas	0.002	259.6	-	-
Oxygen steel furnace gas	0.007	181.9	-	-
Natural gas	0.048	56.1	-	1,094
Municipal wastes (non-biomass fraction)	0.010	91.7	-	-
Industrial waste		106.3	-	-
Waste oils	0.040	73.3	-	-
Peat	0.010	106.0	-	-
Wood/wood waste	0.016	111.8	-	-
Sulphite lyes (black liquor)	0.012	95.3	-	-
Other primary solid biomass	0.012	100.1	-	-
Charcoal	0.030	111.8	-	-



	Net calorific value (terajoule/tonnes)	Effective CO <sub>2</sub> emissions factor (tonnes CO <sub>2</sub> /terajoule)	Weight of a barrel of specific fuel (tonnes/barrel)	Net calorific value (megajoule/mCF)
Biogasoline	0.027	70.8	-	-
Biodiesels	0.027	70.8	-	-
Other liquid biofuels	0.027	79.6	-	-
Landfill gas	0.050	54.6	-	-
Sludge gas	0.050	54.6	-	-
Other biogas	0.050	54.6	-	-
Municipal wastes (biomass fraction)	0.012	100.1	-	-
<b>Sources:</b>	IPCC, 2006 [13]	IPCC, 2006 [13]	UN, 2016 [12]	EIA 2019 [14]

# Appendix 2. Energy content of biofuels

	Energy density (Toe/tonne)	Energy density (Toe/cubic metre)
Biodiesel	0.86	0.78
(Bio)ethanol	0.64	0.51
Source	IPCC, 2006 [13]	IPCC, 2006 [13]

# Appendix 3. IPCC product category definitions

	IPCC definition
<b>Crude oil</b>	Crude oil is a mineral oil consisting of a mixture of hydrocarbons of natural origin, being yellow to black in colour, of variable density and viscosity. It also includes lease condensate (separator liquids) which are recovered from gaseous hydrocarbons in lease separation facilities.
<b>Orimulsion</b>	A tar-like substance that occurs naturally in Venezuela. It can be burned directly or refined into light petroleum products.
<b>Natural gas liquids (NGLs)</b>	NGLs are the liquid or liquefied hydrocarbons produced in the manufacture, purification and stabilisation of natural gas. These are those portions of natural gas which are recovered as liquids in separators, field facilities, or gas processing plants. NGLs include but are not limited to ethane, propane, butane, pentane, natural gasoline and condensate. They may also include small quantities of non-hydrocarbons.
<b>Motor gasoline</b>	This is light hydrocarbon oil for use in internal combustion engines such as motor vehicles, excluding aircraft. Motor gasoline is distilled between 35°C and 215°C and is used as a fuel for land based spark ignition engines. Motor gasoline may include additives, oxygenates and octane enhancers, including lead compounds such as TEL (Tetraethyl lead) and TML (Tetramethyl lead).
<b>Aviation gasoline</b>	Aviation gasoline is motor spirit prepared especially for aviation piston engines, with an octane number suited to the engine, a freezing point of -60°C, and a distillation range usually within the limits of 30°C and 180°C.
<b>Jet gasoline</b>	This includes all light hydrocarbon oils for use in aviation turbine power units. They distil between 100°C and 250°C. It is obtained by blending kerosene and gasoline or naphtha in such a way that the aromatic content does not exceed 25 percent in volume, and the vapour pressure is between 13.7 kPa and 20.6 kPa. Additives can be included to improve fuel stability and combustibility.
<b>Jet kerosene</b>	This is medium distillate used for aviation turbine power units. It has the same distillation characteristics and flash point as kerosene (between 150°C and 300°C but not generally above 250°C). In addition, it has particular specifications (such as freezing point) which are established by the International Air Transport Association (IATA).
<b>Other kerosene</b>	Kerosene comprises refined petroleum distillate intermediate in volatility between gasoline and gas/diesel oil. It is a medium oil distilling between 150°C and 300°C.
<b>Shale oil</b>	A mineral oil extracted from oil shale.
<b>Gas/diesel oil</b>	Gas/diesel oil includes heavy gas oils. Gas oils are obtained from the lowest fraction from atmospheric distillation of crude oil, while heavy gas oils are obtained by vacuum redistillation of the residual from atmospheric distillation. Gas/diesel oil distils between 180°C and 380°C. Several grades are available depending on uses: diesel oil for diesel compression ignition (cars, trucks, marine, etc.); light heating oil for industrial and commercial uses; and other gas oil including heavy gas oils which distil between 380°C and 540°C and are used as petrochemical feedstocks.
<b>Residual fuel oil</b>	This heading defines oils that make up the distillation residue. It comprises all residual fuel oils, including those obtained by blending. Its kinematic viscosity is above 0.1cm <sup>2</sup> /s (10 cSt) at 80°C. The flash point is always above 50°C and the density is always more than 0.90 kg/l.

<b>Liquified petroleum gases</b>	These are the light hydrocarbons fraction of the paraffin series, derived from refinery processes, crude oil stabilisation plants and natural gas processing plants comprising propane (C <sub>3</sub> H <sub>8</sub> ) and butane (C <sub>4</sub> H <sub>10</sub> ) or a combination of the two. They are normally liquefied under pressure for transportation and storage.
<b>Ethane (used to produce plastics)</b>	Ethane is a naturally gaseous straight-chain hydrocarbon (C <sub>2</sub> H <sub>6</sub> ). It is a colourless paraffinic gas which is extracted from natural gas and refinery gas streams.
<b>Naphtha</b>	Naphtha is a feedstock destined either for the petrochemical industry (e.g. ethylene manufacture or aromatics production) or for gasoline production by reforming or isomerisation within the refinery. Naphtha comprises material in the 30°C and 210°C distillation range or part of this range.
<b>Bitumen</b>	Solid, semi-solid or viscous hydrocarbon with a colloidal structure, being brown to black in colour, obtained as a residue in the distillation of crude oil, vacuum distillation of oil residues from atmospheric distillation. Bitumen is often referred to as asphalt and is primarily used for surfacing of roads and for roofing material. This category includes fluidised and cut back bitumen.
<b>Lubricants</b>	Lubricants are hydrocarbons produced from distillate or residue; they are mainly used to reduce friction between bearing surfaces. This category includes all finished grades of lubricating oil, from spindle oil to cylinder oil, and those used in greases, including motor oils and all grades of lubricating oil base stocks.
<b>Petroleum coke</b>	Petroleum coke is defined as a black solid residue, obtained mainly by cracking and carbonising of petroleum derived feedstocks, vacuum bottoms, tar and pitches in processes such as delayed coking or fluid coking. It consists mainly of carbon (90 to 95 percent) and has a low ash content. It is used as a feedstock in coke ovens for the steel industry, for heating purposes, for electrode manufacture and for production of chemicals. The two most important qualities are "green coke" and "calcinated coke". This category also includes "catalyst coke" deposited on the catalyst during refining processes: this coke is not recoverable and is usually burned as refinery fuel.
<b>Refinery feedstocks</b>	A refinery feedstock is a product or a combination of products derived from crude oil and destined for further processing other than blending in the refining industry. It is transformed into one or more components and/or finished products. This definition covers those finished products imported for refinery intake and those returned from the petrochemical industry to the refining industry.
<b>Other oil refinery gas</b>	Refinery gas is defined as non-condensable gas obtained during distillation of crude oil or treatment of oil products (e.g. cracking) in refineries. It consists mainly of hydrogen, methane, ethane and olefins. It also includes gases which are returned from the petrochemical industry.
<b>Paraffin wax</b>	Saturated aliphatic hydrocarbons (with the general formula C <sub>n</sub> H <sub>2n+2</sub> ). These waxes are residues extracted when dewaxing lubricant oils, and they have a crystalline structure with carbon number greater than 12. Their main characteristics are that they are colourless, odourless and translucent, with a melting point above 45°C.
<b>White spirit and SBP</b>	White spirit and SBP are refined distillate intermediates with a distillation in the naphtha/kerosene range. They are sub-divided as: i) Industrial Spirit (SBP): Light oils distilling between 30°C and 200°C, with a temperature difference between 5 percent volume and 90 percent volume distillation points, including losses, of not more than 60°C. In other words, SBP is a light oil of narrower cut than motor spirit. There are 7 or 8 grades of industrial spirit, depending on the position of the cut in the distillation range defined above. ii) White Spirit: Industrial spirit with a flash point above 30°C. The distillation range of white spirit is 135°C to 200°C.
<b>Other petroleum products</b>	Includes the petroleum products not classified above, for example: tar, sulphur, and grease. This category also includes aromatics (e.g. BTX or benzene, toluene and xylene) and olefins (e.g. propylene) produced within refineries.
<b>Anthracite</b>	Anthracite is a high rank coal used for industrial and residential applications. It has generally less than 10 percent volatile matter and a high carbon content (about 90 percent fixed carbon). Its gross calorific value is greater than 23,865 kJ/kg (5,700 kcal/kg) on an ash-free but moist basis.
<b>Coking coal</b>	Coking coal refers to bituminous coal with a quality that allows the production of a coke suitable to support a blast furnace charge. Its gross calorific value is greater than 23 865 kJ/kg (5,700 kcal/kg) on an ash-free but moist basis.
<b>Other bituminous coal</b>	Other bituminous coal is used for steam raising purposes and includes all bituminous coal that is not included under coking coal. It is characterized by higher volatile matter than anthracite (more than 10 percent) and lower carbon content (less than 90 percent fixed carbon). Its gross calorific value is greater than 23 865 kJ/kg (5,700 kcal/kg) on an ash-free but moist basis.

<b>Sub bituminous coal</b>	Non-agglomerating coals with a gross calorific value between 17,435 kJ/kg (4,165 kcal/kg) and 23,865 kJ/kg (5,700 kcal/kg) containing more than 31 percent volatile matter on a dry mineral matter free basis.
<b>Lignite</b>	Lignite/brown coal is a non-agglomerating coal with a gross calorific value of less than 17,435 kJ/kg (4,165 kcal/kg), and greater than 31 percent volatile matter on a dry mineral matter free basis.
<b>Oil shale and tar sands</b>	Oil shale is an inorganic, non-porous rock containing various amounts of solid organic material that yields hydrocarbons, along with a variety of solid products, when subjected to pyrolysis (a treatment that consists of heating the rock at high temperature). Tar sands refers to sand (or porous carbonate rocks) that are naturally mixed with a viscous form of heavy crude oil sometimes referred to as bitumen. Due to its high viscosity this oil cannot be recovered through conventional recovery methods.
<b>Brown coal briquettes (BKBs)</b>	BKBs are composition fuels manufactured from lignite/brown coal, produced by briquetting under high pressure. These figures include dried lignite fines and dust.
<b>Patent fuel</b>	Patent fuel is a composition fuel manufactured from hard coal fines with the addition of a binding agent. The amount of patent fuel produced may, therefore, be slightly higher than the actual amount of coal consumed in the transformation process.
<b>Coke over coke and lignite coke</b>	Coke oven coke is the solid product obtained from the carbonisation of coal, principally coking coal, at high temperature. It is low in moisture content and volatile matter. Also included are semi-coke, a solid product obtained from the carbonisation of coal at a low temperature, lignite coke, semi-coke made from lignite/brown coal, coke breeze and foundry coke. Coke oven coke is also known as metallurgical coke.
<b>Gas coke</b>	Gas coke is a by-product of hard coal used for the production of town gas in gas works. Gas coke is used for heating purposes.
<b>Coal tar</b>	The result of the destructive distillation of bituminous coal. Coal tar is the liquid by-product of the distillation of coal to make coke in the coke oven process. Coal tar can be further distilled into different organic products (e.g. benzene, toluene, naphthalene) which normally would be reported as a feedstock to the petrochemical industry.
<b>Gas works gas</b>	Gas works gas covers all types of gases produced in public utility or private plants, whose main purpose is manufacture, transport and distribution of gas. It includes gas produced by carbonization (including gas produced by coke ovens and transferred to gas works gas), by total gasification with or without enrichment with oil products (LPG, residual fuel oil, etc.), and by reforming and simple mixing of gases and/or air. It excludes blended natural gas, which is usually distributed through the natural gas grid.
<b>Oil works gas</b>	Coke oven gas
<b>Blast furnace gas</b>	Blast furnace gas is produced during the combustion of coke in blast furnaces in the iron and steel industry. It is recovered and used as a fuel partly within the plant and partly in other steel industry processes or in power stations equipped to burn it.
<b>Oxygen steel furnace gas</b>	Oxygen steel furnace gas is obtained as a by-product of the production of steel in an oxygen furnace and is recovered on leaving the furnace. The gas is also known as converter gas, LD gas or BOS gas.
<b>Natural gas</b>	Natural gas should include blended natural gas (sometimes also referred to as Town Gas or City Gas), a high calorific value gas obtained as a blend of natural gas with other gases derived from other primary products, and usually distributed through the natural gas grid (e.g. coal seam methane). Blended natural gas should include substitute natural gas, a high calorific value gas, manufactured by chemical conversion of a hydrocarbon fossil fuel, where the main raw materials are: natural gas, coal, oil and oil shale.
<b>Municipal wastes (non-biomass fraction)</b>	Non-biomass fraction of municipal waste includes waste produced by households, industry, hospitals and the tertiary sector which are incinerated at specific installations and used for energy purposes. Only the fraction of the fuel that is non-biodegradable should be included here.
<b>Industrial waste</b>	Industrial waste consists of solid and liquid products (e.g. tyres) combusted directly, usually in specialised plants, to produce heat and/or power and that are not reported as biomass.

<b>Waste oils</b>	Waste oils are used oils (e.g. waste lubricants) that are combusted for heat production.
<b>Peat</b>	Combustible soft, porous or compressed, sedimentary deposit of plant origin including woody material with high water content (up to 90 percent in the raw state), easily cut, can contain harder pieces of light to dark brown colour. Peat used for non-energy purposes is not included.
<b>Wood/wood waste</b>	Wood and wood waste combusted directly for energy. This category also includes wood for charcoal production but not the actual production of charcoal (this would be double counting since charcoal is a secondary product).
<b>Sulphite lyes (black liquor)</b>	Sulphite lyes is an alkaline spent liquor from the digesters in the production of sulphate or soda pulp during the manufacture of paper where the energy content derives from the lignin removed from the wood pulp. This fuel in its concentrated form is usually 65–70 percent solid.
<b>Other primary solid biomass</b>	Other primary solid biomass includes plant matter used directly as fuel that is not already included in wood/wood waste or in sulphite lyes. Included are vegetal waste, animal materials/wastes and other solid biomass. This category includes non-wood inputs to charcoal production (e.g. coconut shells) but all other feedstocks for production of biofuels should be excluded.
<b>Charcoal</b>	Charcoal combusted as energy covers the solid residue of the destructive distillation and pyrolysis of wood and other vegetal material.
<b>Biogasoline</b>	Biogasoline should only contain that part of the fuel that relates to the quantities of biofuel and not to the total volume of liquids into which the biofuels are blended. This category includes bioethanol (ethanol produced from biomass and/or the biodegradable fraction of waste), biomethanol (methanol produced from biomass and/or the biodegradable fraction of waste), bioETBE (ethyl-tertio-butyl-ether produced on the basis of bioethanol: the percentage by volume of bioETBE that is calculated as biofuel is 47 percent) and bioMTBE (methyl-tertio-butyl-ether produced on the basis of biomethanol: the percentage by volume of bioMTBE that is calculated as biofuel is 36 percent).
<b>Biodiesels</b>	Biodiesels should only contain that part of the fuel that relates to the quantities of biofuel and not to the total volume of liquids into which the biofuels are blended. This category includes biodiesel (a methyl-ester produced from vegetable or animal oil, of diesel quality), biodimethylether (dimethylether produced from biomass), fischer tropsch (fischer tropsch produced from biomass), cold pressed bio oil (oil produced from oil seed through mechanical processing only) and all other liquid biofuels which are added to, blended with or used straight as transport diesel.
<b>Other liquid biofuels</b>	Other liquid biofuels not included in biogasoline or biodiesels.
<b>Landfill gas</b>	Landfill gas is derived from the anaerobic fermentation of biomass and solid wastes in landfills and combusted to produce heat and/or power.
<b>Sludge gas</b>	Sludge gas is derived from the anaerobic fermentation of biomass and solid wastes from sewage and animal slurries and combusted to produce heat and/or power.
<b>Other biogas</b>	Other biogas not included in landfill gas or sludge gas.
<b>Municipal wastes (biomass fraction)</b>	Biomass fraction of municipal waste includes waste produced by households, industry, hospitals and the tertiary sector which are incinerated at specific installations and used for energy purposes. Only the fraction of the fuel that is biodegradable should be included here.

# Appendix 4. Powerplant efficiency

Table A4.1. Coal-fired plants

Country	Average power plant efficiency
World	34%
China	35%
United States	37%
India	27%
Russia	25%
Germany	36%
South Africa	34%
Japan	37%
Korea	35%
Australia	35%
Poland	34%
Ukraine	30%
United Kingdom	38%
Indonesia	31%
Kazakhstan	30%
Taiwan	38%
Czech Republic	28%
Turkey	34%
Canada	38%
Spain	36%
Vietnam	35%
Source	GE, 2016 [15]

Table A4.2. Gas-fired plants

Average power plant efficiency

World	39%
Russian Federation	26%
United States	45%
Japan	45%
Saudi Arabia	32%
Iran	43%
United Arab Emirates	34%
China	39%
Korea	44%
Egypt	45%
India	45%
Uzbekistan	28%
Mexico	45%
Thailand	45%
Turkey	45%
Algeria	38%
Belarus	28%
Italy	45%
Canada	41%
Australia	39%
Turkmenistan	25%
Source	GE, 2016 [15]



### Table A4.3. Other plants

Average operating rate for selected energy sources

Btu per Kilowatt hour	2017
Coal	10465
Petroleum	10834
Natural Gas	7812
Nuclear	10459
Source	EIA, 2018 [16]

# Disclaimer

1. Data and information published in this report and on the TPI Centre website is intended principally for investor use but, before any such use, you should read the TPI Centre's website terms and conditions to ensure you are complying with some basic requirements which are designed to safeguard the TPI Centre while allowing sensible and open use of the methodologies and of the TPI data processed by the TPI Centre. References in these terms and conditions to "data" or "information" on the website shall include the Carbon Performance data, the Management Quality indicators or scores, and all related information.
2. By accessing the data and information published in this report and on the website, you acknowledge that you understand and agree to the website terms and conditions. In particular, please read paragraphs 4 and 5 below which detail certain data use restrictions.
3. The processed data and information provided by the TPI Centre can be used by you in a variety of ways – such as to inform your investment research, your corporate engagement and proxy-voting, to analyse your portfolios and publish the outcomes to demonstrate to your stakeholders your delivery of climate policy objectives and to support the TPI Centre in its initiative. However, you must make your own decisions on how to use the TPI Centre's data as the TPI Centre cannot guarantee the accuracy of any data made available, the data and information on the website is not intended to constitute or form the basis of any advice (investment, professional or otherwise), and the TPI Centre does not accept any liability for any claim or loss arising from any use of, or reliance on, the data or information. Furthermore, the TPI Centre does not impose any obligations on supporting organisations to use TPI Centre data in any particular way. It is for individual organisations to determine the most appropriate ways in which the TPI Centre data can be helpful to their internal processes.
4. Subject to paragraph 3 above, the Management Quality and the Carbon Performance indicators that are part of the TPI online tool and available publicly on the TPI Centre's website are:
  - Free, if they are used for internal and not for commercial purposes, including for research, as one of the inputs to inform portfolio construction, for financial decision-making including cases of lending and underwriting, for engagement and client reporting, for use in proprietary models as part of climate transition analysis and active investment management.
  - Restricted, unless licensed where the use is for further commercial exploitation through redistribution, derived data creation, analytics, and index or fund creation (inclusive of where the index is used as the basis for the creation of a financial product, or where TPI data is a key constituent of a fund's construction).
  - For the terms of use of the sources supporting the TPI Centre's methodologies, please refer to the individual sectoral Carbon Performance methodology notes. To produce the TPI data, the Centre analysts may use CDP data as a secondary input for verification purposes, in addition to companies' published sources.
5. Notwithstanding any other provision of these website terms and conditions, none of the data or information on the website may be reproduced or made available by you to any other person except that you may reproduce an insubstantial amount of the data or information on the website for the uses permitted above.
6. The data and information on the website may not be used in any way other than as permitted above. If you would like to use any such data or information in a manner that is not permitted above, you will need the TPI Centre's written permission. In this regard, please email all inquiries to [info@transitionpathwayinitiative.org](mailto:info@transitionpathwayinitiative.org).

## Use of Intergovernmental Panel on Climate Change (IPCC) data

As TPI uses IPCC data, please note the following:

- Use of IPCC data, IPCC databases, and/or IPCC tools and scenarios is at the User's sole risk. Under no circumstances shall the IPCC, World Meteorological Organization (WMO) or United Nations Environment Programme (UNEP) be liable for any loss, damage, liability, or expense incurred or suffered that is claimed to have resulted from the use or accessing of IPCC data, IPCC databases, tools, and/or scenarios, including, without limitation, any fault, error, omission, interruption, or delay with respect thereto. Nothing herein shall constitute or be considered to be a limitation upon or a waiver of the privileges and immunities of WMO or UNEP, which are specifically reserved.

## **LSE Transition Pathway Initiative Centre**

Grantham Research Institute on Climate Change  
and the Environment

London School of Economics and Political Science

Houghton Street

London WC2A 2AE, UK

T +44 (0)20 7107 5027

E [tpi@lse.ac.uk](mailto:tpi@lse.ac.uk)

## **Transition Pathway Initiative**

C/o UNPRI Association

5th Floor, 25 Camperdown Street

London E1 8DZ, UK

T +44 (0)20 3714 3141

E [info@transitionpathwayinitiative.org](mailto:info@transitionpathwayinitiative.org)

[@tp\\_initiative](#)

[transitionpathwayinitiative.org](http://transitionpathwayinitiative.org)

